

Jc714 U.S. PTO

02/22/00

NEW UTILITY PATENT APPLICATION
TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Docket No.
M3477.0000/P011Total pages in this
submission

Jc714 U.S. PTO

09/507466

02/22/00

TO THE ASSISTANT COMMISSIONER FOR PATENTSBox Patent Application
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

OPTICAL DEVICE, SYSTEM AND METHOD

and invented by:

David R. Brown

IF A CONTINUATION APPLICATION, check appropriate box and supply requisite information:☐

Continuation

☐

Divisional

☐

Continuation-in-part (CIP) of prior application No.:

Enclosed are:

Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 14 pages(s) and including the following:
 - a. ☒ Descriptive title of the invention
 - b. ☐ Cross references to related applications (*if applicable*)
 - c. ☐ Statement regarding Federally-sponsored research/development (*if applicable*)
 - d. ☐ Reference to microfiche appendix (*if applicable*)
 - e. ☒ Background of the invention
 - f. ☒ Brief summary of the invention
 - g. ☒ Brief description of the drawings (*if drawings filed*)
 - h. ☒ Detailed description
 - i. ☒ Claims as classified below
 - j. ☒ Abstract of the disclosure

Application Elements (continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 U.S.C. 113)
☐ Formal ☒ Informal Number of sheets: 4
4. ☒ Oath or Declaration
a. ☒ Newly executed (original or copy) ☐ Unexecuted
b. ☐ Copy from a prior application (37 C.F.R. 1.63(d) (for continuation/divisional applications only)
c. ☒ With Power of Attorney ☐ Without Power of Attorney
5. ☐ Incorporation by reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer program in microfiche
7. ☐ Genetic sequence submission (if applicable, all must be included)
a. ☐ Paper copy
b. ☐ Computer readable copy
c. ☐ Statement verifying identical paper and computer readable copies

Accompanying Application

8. ☒ Assignment papers (cover sheet & document(s))
9. ☐ 37 C.F.R. 3.73(b) statement (when there is an assignee)
10. ☐ English translation document (if applicable)
11. ☐ Information Disclosure Statement/PTO-1449 ☐ Copies of IDS citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certified copy of priority document(s) (if foreign priority is claimed)
15. ☐ Certificate of Mailing
☐ First Class ☐ Express Mail (Label No.: _____)
16. ☐ Small Entity statement(s) -- # submitted _____ (if Small Entity status claimed)

Accompanying Application (continued)

- 17.
- ☐
- Additional enclosures (please identify below):


Fee Calculation and Transmittal

The filing fee for this utility patent application is calculated and transmitted as follows:

- ☒
- Large Entity
- ☐
- Small Entity

CLAIMS AS FILED					
For	# Filed	# Allowed	# Extra	Rate	Fee
Total Claims	18	- 20 =		x \$18.00	
Independent Claims	3	- 3 =		x \$78.00	
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					
Other Fees (specify purpose): Recordation Form Cover Sheet					\$40.00
BASIC FEE					\$690.00
TOTAL FILING FEE					\$730.00

- ☒ A check in the amount of \$730.00 to cover the total filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and Deposit Account No. 4 - 1073 as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of _____ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.31(b).



Mark J. Thronson

Attorney Reg. No.: 33,082
 Dickstein Shapiro Morin & Oshinsky LLP
 2101 L Street NW
 Washington, DC 20037-1526
 (202) 785-9700

Dated: February 22, 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR U.S. LETTERS PATENT

Title: OPTICAL DEVICE, SYSTEM AND METHOD

Inventor: David R. Brown

Dickstein Shapiro Morin
& Oshinsky LLP
2101 L Street, N.W.
Washington, D.C. 20037

(202) 785-9700

FIELD OF THE INVENTION

The present invention relates generally to optics and optical systems and devices. The present invention also relates to a device for forming an homogenized light pattern. The present invention also relates to a method of making an optical device.

BACKGROUND OF THE INVENTION

Known techniques for homogenizing light make use of arrayed micro-lenses, diffractive diffusers, ground glass diffusers, and holographically-generated diffusers. Micro-lens arrays homogenize light by creating an array of overlapping diverging cones of light. Each cone originates from a respective micro-lens and diverges beyond the focal spot of the lens. In the known arrays, the individual lenses are identical to each other. Ground glass diffusers are formed by grinding glass with an abrasive material to generate a light-scattering structure in the glass surface.

Micro-lens arrays, ground glass diffusers and holographic diffusers all have the disadvantage of not being able to control the angular spread of the homogenized, diverging light. Light in general has an angular spread that is fairly uniform over a desired angular region, but the boundaries of the angular region are blurred. With the known diffuser methods, the energy roll-off at the edge of the desired angular spread can extend well beyond this region.

Diffractive diffusers can be used to control the angular spread of the output light, but such diffusers are limited with respect to the amount of spread that they can impart to the output light. Due to fabrication limitations for short wavelength sources, visible or below, and limitations in the physics of the structures for longer wavelengths the maximum angular spread is limited. Further, diffractive diffusers used in their traditional binary form can include a significant amount of background energy and the patterns must be symmetric about the optical axis.

Thus, there is a need for a device which can homogenize light while controlling a broad angular spread of the homogenized, diverging light beam. Additionally, there is a need for a method of making an improved device for homogenizing light.

SUMMARY OF THE INVENTION

The disadvantages of the prior art are overcome to a great extent by the present invention. The present invention relates to an optical device formed of a plurality of optical elements. The elements may be used to direct portions of an incident light beam in predetermined, respective directions. The optical elements may be formed adjacent to each other in a two-dimensional array. Adjacent elements may have different shapes. The locations of the elements in the array may be essentially random with respect to the directions of the corresponding light beam portions.

According to preferred embodiments of the invention, the optical elements may be formed of transparent or reflective materials. The output surfaces of the respective elements may be flat and planar or they may be curved and non-planar.

According to another aspect of the invention, the optical device may be used to form an angular pattern. Alternatively, the device may be used to split the incoming beam into sub-beams.

The present invention also relates to an optical system that has a light source and an optical homogenizing device. The optical device may be formed of a large number of micro-wedges. The wedges may be used to form respective non-adjacent portions of a desired angular pattern. In a preferred embodiment of the invention, adjacent wedges may be formed with different three-dimensional configurations.

The present invention also relates to a method of making a multi-faceted optical device. The method includes the steps of (1) dividing an angular pattern into sub-angular regions, (2) determining micro-wedge configurations for directing beam

portions to the sub-angular regions, and (3) generating an array of micro-wedges according to the determined configurations, such that adjacent wedges have different configurations.

According to another aspect of the invention, the two-dimensional arrangement or ordering of the wedges in the device array is essentially random with respect to the two-dimensional arrangement of the sub-angular regions in the pattern. According to this aspect of the invention, the respective micro-wedge configurations may be assigned to random locations in the array. Thus, the relative positions or order of the wedges in the array has essentially no relationship to the relative positions or order of the sub-angular regions in the pattern. According to yet another aspect of the invention, the output surface slopes for the micro-wedges are calculated by a programmed general-purpose computer based on the locations of the respective sub-angular regions in the desired pattern.

In a preferred embodiment of the invention, appropriate phase tare surfaces may be used to divide the output surfaces of the micro-wedges into stepped or terraced surfaces, to thereby reduce the overall thickness of the optical device.

According to yet another aspect of the invention, an optical homogenizing device is formed of a tiled array of sub-devices, where each sub-device has randomly arranged micro-wedges. The tiled device may be used, for example, to handle large diameter input beams.

Thus, the present invention provides a method and apparatus for homogenizing a beam of light. The invention makes use of micro-structures in an array where each optical element or micro-wedge is different from its adjacent neighbor in size and slope. The array of different micro-wedges can homogenize light sources without the disadvantages of the prior art. Various combinations and alterations to the micro-wedge array may include: adding a phase bias to the micro-wedges to further scramble the incoming beam; and adding a lens function to the surface of the array or to the back surface of the device.

The present invention may be used to homogenize light sources, perform beam splitting operations, and/or to redirect light in a given direction.

These and other advantages and features of the invention will become
5 apparent from the following detailed description of the invention which is provided in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

10 FIG. 1 is a schematic perspective view of an optical system constructed in accordance with a preferred embodiment of the invention.

FIG. 2 is a partial plan view of the optical device shown in FIG. 1.

15 FIG. 3 is a cross sectional view of the optical device of FIG. 3, taken along the line 3-3.

FIG. 4 illustrates a method of making the optical device of FIGS. 2 and 3.

20 FIG. 5 is a perspective view of another optical device constructed in accordance with the present invention.

FIG. 6 is a partial cross sectional view of yet another optical device constructed in accordance with the present invention.

25 FIG. 7 is a partial cross sectional view of yet another optical device constructed in accordance with the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

30 Referring now to the drawings, where like reference numerals designate like elements, there is shown in FIG. 1 an optical system 10 constructed in accordance with

a preferred embodiment of the invention. The optical system 10 has a light source 12 for generating a light beam 14, and an optical device 16 for homogenizing the beam 14. In operation, the device 16 may be used to form an angular pattern 18. In the illustrated embodiment, the pattern constitutes the letter "H." In alternative
5 embodiments, the device 16 may be used to form a wide variety of patterns, including for example a split beam pattern.

In a preferred embodiment of the invention, the optical device 16 is formed of an array of optical wedges 22, 24. The wedges 22, 24 receive incident portions of
10 the input beam 14 and direct the beam portions 46, 48 toward respective portions 50, 52 of the angular pattern 18.

As shown in more detail in FIG. 2, the optical device 16 may be formed of numerous square or rectangular-shaped micro-wedges 22, 24, 26, 28, 30, 32, 34, 36,
15 38, 40, 42, 44. Although only twelve wedges 22-44 are shown in FIG. 2, the optical device 16 may have ten thousand or more wedges 22-44 distributed randomly across its output surface. The configuration (i.e., three-dimensional shape) and slope of each wedge 22-44 may be different than the configuration and slope of each adjacent wedge 22-44. In a preferred embodiment of the invention, the wedges 22-44 have flat, planar
20 optical output surfaces (FIG. 3). The present invention should not be limited, however, to the preferred embodiments shown and described herein in detail.

In a preferred embodiment of the invention, the areas of adjacent wedges 22-44 are made unequal by selecting the lengths of the edges 142 appropriately. As
25 shown in FIG. 2, for example, the lengths L1 and L2 of edges (or boundaries) 142 extending in a first direction may be made not equal to each other ($L1 \neq L2$). Similarly, the lengths L3 and L4 of edges 142 that extend in the orthogonal direction may be made not equal to each other ($L3 \neq L4$). By constructing the wedges 22-44 in different sizes by making their side edges 142 of different lengths, interference effects
30 may be reduced.

The arrows 60 in FIG. 2 represent the direction of increasing thickness for the respective wedges 22-44 (where thickness is measured in a direction perpendicular to the plane of the page). Thus, the first wedge 22 increases in thickness from left to right in FIG. 2, whereas the second wedge 24 increases in thickness from top to bottom as viewed in FIG. 2. A third wedge 26 increases in thickness in a direction toward the lower left corner of FIG. 2. A fourth wedge 32 increases in thickness in a direction toward the upper left corner of FIG. 2.

Phase tare surfaces 70, 72, 74, 76, 78, 80, 82, 84 may be provided to reduce the overall thickness of the optical device 16. Thus, the first wedge 22 is separated by a tare surface 70 into first and second portions 90, 92. The slopes (60) of the first and second portions 90, 92 may be equal to each other. That is, the planar output surfaces of the first and second portions 90, 92 may be parallel to each other. Likewise, the second wedge 24 is separated by a tare surface 72 into first and second parallel portions 94, 96. The slopes (designated by arrows 60) of the two portions 94, 96 may be equal to each other.

The tare surfaces 70-84 in effect operate to fold the output surfaces of the micro-wedges 22-44. The tare surfaces 70-84 may be especially useful when the slopes (60) of the wedge output surfaces are relatively great. The heights of the tare surfaces 70-84 (measured in the direction from top to bottom as viewed in FIG. 3) may be a function of the wavelength of the incident light, if desired. For example, the heights of the tare surfaces 70-84 may be integer multiples of the wavelength of the incoming light beam 14.

As shown in FIG. 3, the phase tare surfaces 70-84 may lie in planes that are essentially parallel to the propagation direction of the input beam 14. In FIG. 3, the surfaces of the micro-wedges located behind the cross sectional line 3-3 are not shown for the sake of clarity of illustration. In other words, FIG. 3 represents only a thin slice of the optical device 16 taken along the line 3-3.

In operation, the light source 12 transmits the input beam 14 toward the optical device 16. The input beam 14 may have an uneven intensity distribution across its cross section. The beam 14 is directed onto the optical device 16 such that portions of the beam 14 are incident on respective wedges 22-44. The wedges 22-44 direct the beam portions 46, 48 in predetermined directions to form an homogenized angular pattern 18. The homogenized pattern 18 may have a substantially uniform light intensity distribution. The beam portions 46, 48 are transmitted in different directions since each wedge 22-44 is different from its adjacent and neighboring wedges 22-44 in size and/or slope (60). Thus, the light output 46, 48 of each wedge 22-44 is directed or angled toward a particular sub-angular region 50, 52 of the desired angular spread 18. Although the angular spread or pattern 18 is shown as the letter "H" in FIG. 1, the optical device 16 also may be used to split the input light beam 14 and/or to form a variety of other patterns.

Referring now to FIG. 4, a preferred method of making the optical device 16 includes the step of dividing the desired pattern 18 into small sub-angular regions (Step 150). The size of the incident beam 14 may be used to determine an appropriate number of sub-angular regions into which the pattern 18 should be divided. If the cross sectional area of the beam 14 is relatively large, then a relatively large number of sub-angular regions may be employed. If the cross sectional area of the beam 14 is relatively small, then a relatively small number of sub-angular regions may be employed. Although only two sub-angular regions 50, 52 are shown in FIG. 1 for the sake of clarity, the present invention may be practiced by dividing the entire pattern 18 into ten thousand or more such sub-angular regions. The number of sub-angular regions may be related to the number of wedges to be formed in the optical device 16.

Then, using appropriate geometric calculations, a slope and a three dimensional configuration for each wedge is determined such that the wedge will direct a portion of the input beam to a respective sub-angular region (Step 152). Then, a location within the device 16 is randomly chosen for each calculated wedge configuration (Step 154). The random placement of the wedges 22-44 in the optical

device 16 causes the pattern 18 to have a uniform intensity. In other words, the random location of the wedges 22-44 causes the input beam 14 to be homogenized.

The output surfaces of the wedges 22-44 may then be formed in a suitable substrate (e.g., glass) by gray scale photolithography, a suitable direct write method (e.g., electron beam or laser), or by another suitable technique (Step 156).

If the number of sub-angular regions in the pattern 18 is less than the number of micro-wedges desired to be arrayed in the device 16, then some of the wedges may have the same slope and size. The similar wedges will direct light energy to the same location or sub-angular region. However, the wedges with similar slopes, sizes and shapes are preferably not located adjacent one another.

The illustrated optical device 16 may be used to increase the amount of angular spread in the pattern 18 while maintaining a well defined pattern boundary 158 (FIG. 1). For example, at a wavelength of two hundred forty eight nanometers, with efficiencies of from eighty five percent to ninety five percent, depending on the shape of the output pattern 18, a half angle of approximately seven degrees is obtainable.

In addition, the device 16 may be used efficiently over a broad wavelength band, including but not limited to white light. This is an advantage over diffractive diffusers since diffractive diffusers are tuned to a particular wavelength and have decreased efficiency at different wavelengths.

According to another embodiment of the invention, an optical device 100 (FIG. 5) may be formed of a tiled array of smaller devices 16. The tiled device 100 may be used, for example, to handle large diameter input beams. The size of each tile 16 may be slightly different from the neighboring tiles 16 to eliminate interference effects that might otherwise be caused by a repeating pattern. The intensity of light transmitted through each tile 16 may be different, which may cause a slight change in the amount of energy imparted to each sub-angular region in the pattern 18. This effect is reduced, however, by the random placement of wedges within each tile 16.

For certain desired angular regions, the number of sub-angular regions required to fill the region can be very large (for example, greater than ten thousand) which requires a very large number of micro-wedges. In these instances, the input beam 14 should have a small diameter to illuminate all portions of the tiles 16. By decreasing the size of the individual micro-wedges, the input beam size can be reduced. The size of the wedges 22-44 preferably should not be so small, however, as to cause the diffraction angle defined by the wedge apertures to become too great.

As shown in FIG. 6, the output surfaces 130 of an optical device 16' may have slight curvatures. The surfaces 130 may be spherical, parabolic or the like. The output surfaces 130 may be separated by tare surfaces and discontinuities 132 similar to the tare surfaces and rectangular facet boundaries shown in FIGS. 2 and 3. The slight curvatures shown in FIG. 6 produce narrow bands of angles instead of single angles. The illustrated curvatures can help to improve the filling of large angular patterns 18 with fewer facets in the optical device 16'. The embodiment shown in FIG. 6 otherwise operates similarly to the embodiment shown in FIGS. 1-3.

FIG. 7 displays an optical device 16'' employed in a reflection mode. In this embodiment, the input light 14 is propagated into a micro-wedge array 16''. A mirror coating 122 is used on the array output surfaces which reflects the input light 14 to direct beam portions 46', 48' toward the respective portions of the desired pattern 18.

The present invention may also be employed with a phase bias device or an optical lens 140 as shown schematically in FIG. 1. The lens 140 may be separate from the optical device 16 or it may be constructed as an integral part of the optical device 16. The lens 140 may be on either side of the micro-wedges 22-44. The lens 140 may be used, for example, to perform an optical Fourier-transform operation.

According to yet another aspect of the invention, the facet boundaries 142 (FIG. 2) of each micro-wedge 22-44 may be randomized to further reduce the effects of discontinuities at the boundaries 142.

Reference has been made to preferred embodiments in describing the invention. However, additions, deletions, substitutions, or other modifications which would fall within the scope of the invention defined in the claims may be implemented by those skilled in the art without departing from the spirit or scope of the invention. Accordingly, the invention is not to be considered as limited by the foregoing description, but is only limited by the scope of the appended claims.

What is claimed as new and desired to be protected by Letters Patent of the United States is:

1. An optical device, comprising:

a first optical element for directing a first portion of an incident light beam in a predetermined first direction; and

a second optical element for directing a second portion of said incident light beam in a predetermined second direction, said second direction being different than said first direction, said second optical element being adjacent said first optical element, and wherein the shape of said second optical element is different than the shape of said first optical element.

2. The device of claim 1, wherein said optical elements are transparent.

3. The device of claim 1, wherein said optical elements are reflective.

4. The device of claim 1, wherein said optical elements include micro-wedges with planar output surfaces.

5. The device of claim 1, wherein said optical elements include non-planar output surfaces.

6. The device of claim 1, further comprising a lens for performing a Fourier transform operation.

7. The device of claim 1, further comprising a device for optically modifying said incident light beam.

8. The device of claim 1, wherein said optical elements are arranged to split the incident light beam.

9. An optical system, comprising:

a light source for providing a light beam; and

an optical device for homogenizing said beam, said optical device including adjacent optical elements for forming respective non-adjacent portions of an angular

pattern, and wherein said optical elements have different three-dimensional configurations.

10. The system of claim 9, wherein said device is transparent.

11. The system of claim 10, wherein said optical elements include planar output surfaces.

12. A method of making an optical device, said method comprising the steps of:

dividing an angular pattern into a plurality of sub-angular regions;
determining micro-wedge configurations for directing light to said sub-angular regions; and

subsequently, generating an array of micro-wedges according to said micro-wedge configurations, such that adjacent micro-wedges in said array have different configurations.

13. The method of claim 12, wherein the two-dimensional arrangement of said micro-wedges in said array is essentially random with respect to the two-dimensional arrangement of said sub-angular regions of said pattern.

14. The method of claim 13, further comprising the step of assigning said micro-wedge configurations to random locations in said array.

15. The method of claim 14, wherein said determining step includes the step of calculating output surface slopes for said micro-wedges.

16. The method of claim 15, wherein said step of generating said array includes the step of forming phase tare surfaces in said micro-wedges.

17. The method of claim 16, wherein said generating step includes the step of forming output surfaces for said micro-wedges.

18. The method of claim 12, further comprising the step of providing a plurality of tiles of said micro-wedge arrays.

01
02
03
04
05
06
07
08
09
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2213
2214
2215
2216
2217
2218
2219
2220
2221
222

ABSTRACT

An optical device is formed of an array of micro-wedges where each micro-wedge is different in size and shape from adjacent micro-wedges. Each micro-wedge of the array directs light in a predetermined direction toward a particular sub-region of an angular pattern. The positions of the micro-wedges in the device may be essentially random with respect to the corresponding positions of the sub-regions. The device causes the output light to fill a large angular spread with homogenized light with clear boundaries and edges. The device employs refraction or reflection, and the device operates efficiently over a broad wavelength band.

(10)
 (11)
 (12)
 (13)
 (14)
 (15)
 (16)
 (17)
 (18)
 (19)
 (20)
 (21)
 (22)
 (23)
 (24)
 (25)
 (26)
 (27)
 (28)
 (29)
 (30)
 (31)
 (32)
 (33)
 (34)
 (35)
 (36)
 (37)
 (38)
 (39)
 (40)
 (41)
 (42)
 (43)
 (44)
 (45)
 (46)
 (47)
 (48)
 (49)
 (50)
 (51)
 (52)
 (53)
 (54)
 (55)
 (56)
 (57)
 (58)
 (59)
 (60)
 (61)
 (62)
 (63)
 (64)
 (65)
 (66)
 (67)
 (68)
 (69)
 (70)
 (71)
 (72)
 (73)
 (74)
 (75)
 (76)
 (77)
 (78)
 (79)
 (80)
 (81)
 (82)
 (83)
 (84)
 (85)
 (86)
 (87)
 (88)
 (89)
 (90)
 (91)
 (92)
 (93)
 (94)
 (95)
 (96)
 (97)
 (98)
 (99)
 (100)

FIG. 1

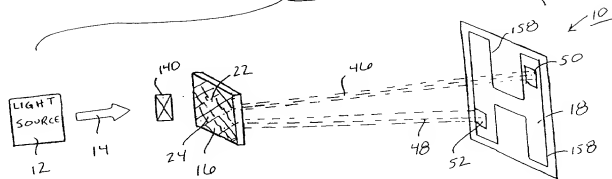


Fig. 2

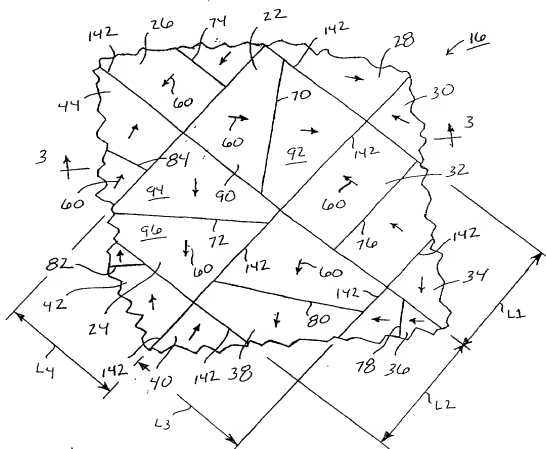


Fig. 3

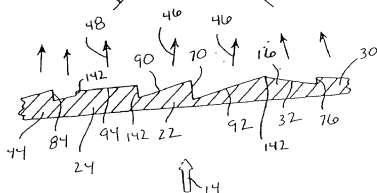


Fig. 4

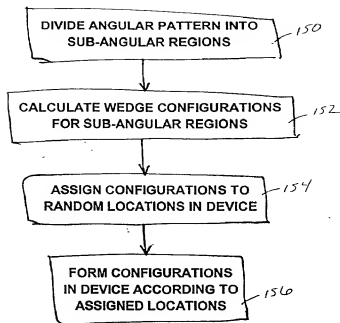


Fig. 5




Fig. 6


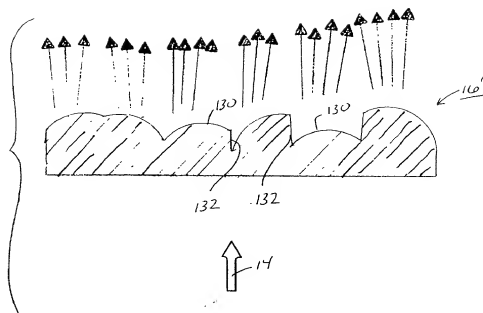


Fig. 7

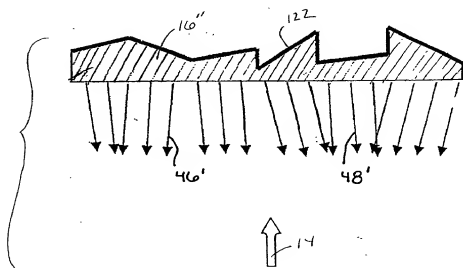

Docket No.
M3477.0000

Declaration and Power of Attorney for Patent Application

English Language Declaration

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

OPTICAL DEVICE, SYSTEM AND METHOD

the specification of which (check one)

☒ is attached hereto.

☐ was filed on _____
as United States Application No. or PCT International Application No. _____
and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d) or Section 365(b) of any foreign applications(s) for patent or inventor's certificate, or Section 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate or PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not
Claimed

(Number) (Country) (Filing Date)

☐

(Number) (Country) (Filing Date)

☐

(Number) (Country) (Filing Date)

☐

PATENT Docket No.: M3477.0000
Serial No.: Not Yet Assigned

Page 2

I hereby claim the benefit under 35 U.S.C. Section 119(e) of any United States provisional application(s) listed below:

_____ (Application Serial No.)	_____ (Filing Date)
_____ (Application Serial No.)	_____ (Filing Date)
_____ (Application Serial No.)	_____ (Filing Date)

I hereby claim the benefit under 35 U.S.C. Section 120 of any United States application(s), or Section 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. Section 112. I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, C.F.R., Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)
_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)
_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

PATENT Docket No.: M3477.0000
Serial No.: Not Yet Assigned

Page 3


POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Gary M. Hoffman, 26,411; Thomas J. D'Amico, 28,371; Donald A. Gregory, 28,954; James W. Brady Jr., 32,115; Jon D. Grossman, 32,699; Mark J. Thronson, 33,082; Jeremy A. Cubert, 40,399; Laurence E. Fisher, 37,131; Brian A. Lemm, 43,748; Gianni Minutoli, 41,198; Edwin Oh, P-45,319; Eric Oliver, 35,307; William E. Powell III, 39,803; Paul L. Ratcliffe, 45,290; Mark E. Strickland, 45,138 and Salvatore P. Tamburo, P-45,153.

Send Correspondence to:

Mark J. Thronson
Dickstein Shapiro Morin & Oshinsky LLP
2101 L Street NW
Washington, DC 20037-1526

Direct Telephone Calls to: 202-775-4742

Full name of sole or first inventor	
David R. Brown	
Sole or first inventor's signature	Date
	X 2/18/00
Residence	
Meridianville, Alabama	
Citizenship United States of America	
Post Office Address	
216 Constitution Drive Meridianville, Alabama 35759	

Full name of second inventor	
Second inventor's signature	Date
Residence	
Citizenship	
Post Office Address	